


PPMB SERIES MOORING BUOYS

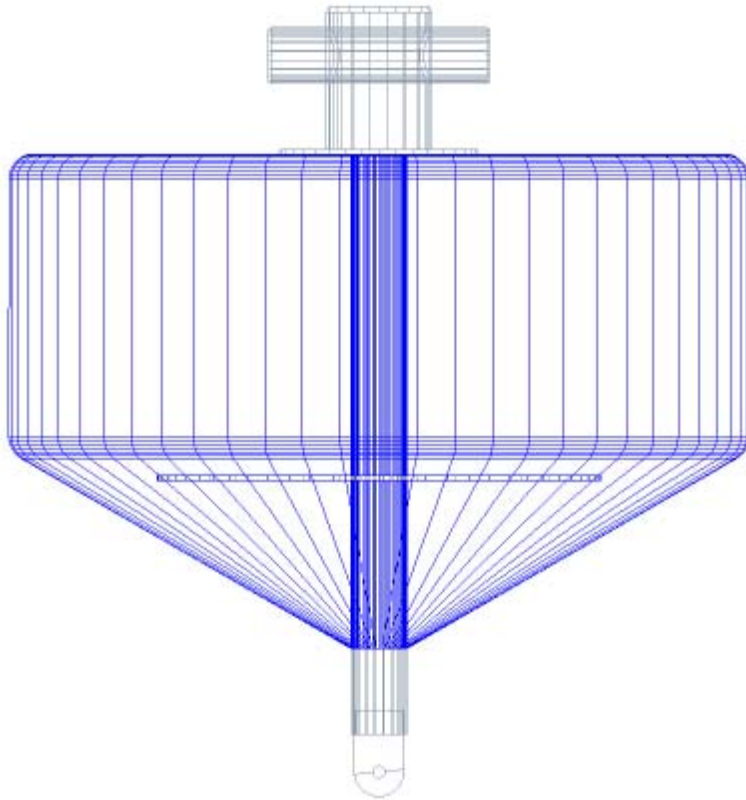

PPMB Series buoys are flat top, coned bottom mooring buoys designed for rough water conditions. An anti-skid surface is optional on the flat deck. There is a hefty oversized cruciform for attachment of large diameter lines

Seven foot diameter and larger buoys have an inner chamber that is filled with polyurethane foam. This foam is protected by a thick polyethylene foam layer which is in turn protected by a Spectra® 900 reinforced Seathane® polyurethane skin.


Metallic components are hot dipped galvanized carbon steel. Aluminum metalized carbon steel or stainless steel metal components are options.

These Mooring buoys require an underwater weight of 12% to 40% of their net buoyance be provided by their mooring.

Model No.	Diameter	St. Side Height	Cone Height	Through Pipe Size	Weight	Net Buoyancy
PPMB-2	24"	10"	6"	2" Sch. 80	51 lbs.	164 lbs.
PPMB-2.5	30"	12"	8"	3" Sch. 40	90 lbs.	325 lbs.
PPMB-3	36"	14"	10"	3" Sch. 80	130 lbs.	535 lbs.
PPMB-4	48"	20"	14"	4" Sch. 40	297 lbs.	1,330 lbs.
PPMB-5	60"	24"	16"	4" Sch. 80	585 lbs.	2,450 lbs.
PPMB-6	72"	30"	20"	6" Sch. 40	845 lbs.	4,945 lbs.
PPMB-7	84"	32"	24"	6" Sch. 80	1,435 lbs.	6,700 lbs.
PPMB-9	108"	42"	30"	8" Sch. 80	3,200 lbs.	15,600 lbs.
PPMB-12	144"	56"	40"	12" Sch. 80	5,700 lbs.	37,600 lbs.

These buoys are not intended for use where ice may crust in excess of 3".

A version of the PPMB Series buoys is available with a "break-away" cruciform.

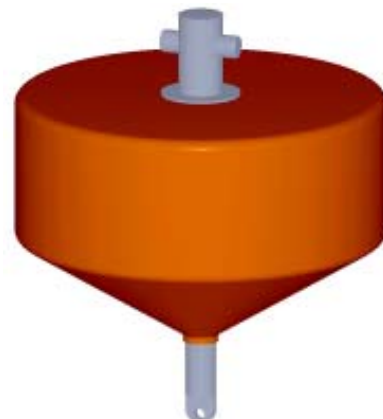

*Seathane® is a trademark of Urethane Technologies, Inc.
Spectra® is a trademark of Allied-Signal Corp.*