


UB SERIES UTILITY BUOYS

UB series buoys were designed as utility buoys for supporting lines and other items.

- The UB buoys series are made of closed cell, crosslinked poly-ethylene foam covered with a tough fabric reinforced Seathane® polyurethane skin.

- Steel components of these buoys are hot dipped galvanized carbon steel. Aluminum metalized carbon steel and 304 stainless steel are optional.

UB series buoys are not internally ballasted . This buoy is designed to float with the cylinder in a vertical position. An underwater weight of 12% to 40% of the buoy's net buoyancy should be provided by the mooring.

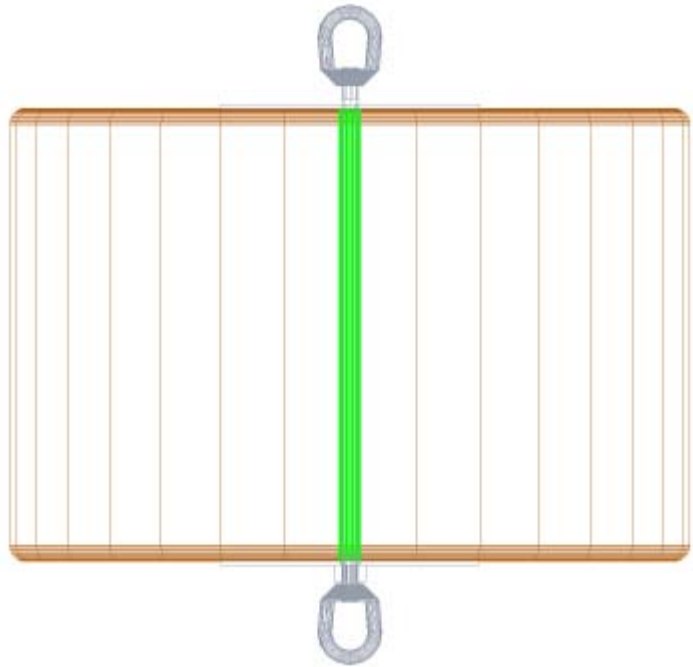

| Model No. | Diameter | Height | Maximum Through Pull | Weight | Net Buoyancy |
|-----------|----------|--------|----------------------|----------|--------------|
| UB30-25 | 30" | 25" | 19,600 lbs. | 80 lbs. | 570 lbs. |
| UB42-28 | 42" | 28" | 19,600 lbs. | 160 lbs. | 1,275 lbs. |



These buoys are not intended for use in areas where ice may crust in excess of 2".

Seathane® is a trademark of Urethane Technologies, Inc.