


6X12, 6X14 & 6X16 LIGHTED FAIRWAY MARKER BUOYS

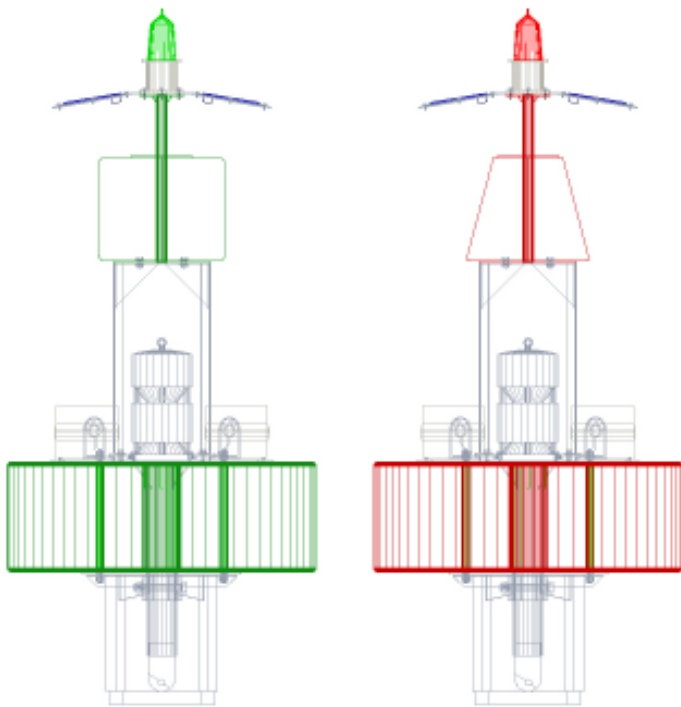

6 X 12, 6x14 & 6X16 lighted marker buoys are available with either can or nun daymarks. They are intended to mark the boundaries of navigable water ways, passes, fairways or channels. The 6X12 version is designed for use in areas where only a moderate buoyancy is required. The 6X14 and 6X16 versions are designed for use when a higher buoyancy is needed.

These units use a 120 to 155 mm Tidelands-Signal, ESSI or Automatic Power light. The daymark/radar reflector is 5086 aluminum. Options include a wide array of solar panels.

The buoys depicted here are shown with an ESSI SA-850/1A fog horn and dual ESSI battery cases. The buoy hull is made of a closed cell, crosslinked polyethylene foam protected by a tough Spectra® high strength fabric reinforced Seathane® polyurethane skin. These buoys are self righting and do not depend on the weight provided by their mooring.

Steel components are hot dip galvanized with aluminum metalized carbon steel and 304 stainless steel optional. Aluminum components are 5086 aluminum.

Model No.	Hull Dia./Height	Cwt. Base Height	Overall Height*	Weight **	Net** Buoyancy
6X12-CB	70" / 25"	30"	150"	2,120 lbs.	1,425 lbs.
6X12-NB	70" / 25"	30"	150"	2,115 lbs.	1,430 lbs.
6X14-CB	70" / 36"	36"	167"	2,320 lbs.	2,735 lbs.
6X14-NB	70" / 36"	36"	167"	2,315 lbs.	2,740 lbs.
6X16-CB	72" / 36"	48"	193"	2,600 lbs.	4,145 lbs.
6X16-NB	72" / 36"	48"	193"	2,585 lbs.	4,160 lbs.

6X12-CB, 6X14-CB & 6X16-CB have a can shaped daymark
 6X12-NB, 6X14-NB & 6X16-NB have a nun shaped daymark.

* Includes a Tideland-Signal ML-155 light.

** Weight includes 275 lbs. of payload
 (batteries, light, solar panels, fog horn, etc.)

The net buoyancy listed is in sea water of 63.87 lbs./ cu. ft.

These buoys are not intended for use in areas where ice may crust in excess of 3" thick.



Seathane® is a trademark of Urethane Technologies, Inc.
 Spectra® is a trademark of Allied-Signal Corp.